

Job Name: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Submitted To: \_\_\_\_\_

Construction: \_\_\_\_\_

Reference: \_\_\_\_\_

Approval: \_\_\_\_\_

Date: \_\_\_\_\_

Submitted By: \_\_\_\_\_

Unit: \_\_\_\_\_

Drawing #: \_\_\_\_\_

## QS09WP2BEA



## Indoor Accessories


Remote Controller (Included)	WJ26X35394
Wired Controller	QACT17B
Refrigerant Detection Sensor (RDS)	UALS01A

## Specifications

Cooling	Rated Cooling Capacity Btu/hr	9,000
Heating	Rated Heating Capacity Btu/hr	10,000
Power	Voltage, Cycle, Phase V/Hz/Phase	208-230/60/1
	Operating Voltage Range	187-253 VAC
Indoor Unit	Fan Speed Stages	5 + Auto
	Airflow CFM: Cooling (Turbo/High/Med/Low/Quiet)	395/355/310/260/170
	Motor Speed RPM: Cooling (Turbo/High/Med/Low/Quiet)	1200/1100/875/650/610
	Indoor Sound Level dB: Cooling (Turbo/High/Med/Low/Quiet)	44/42/36/32/27
	Airflow CFM: Heating (Turbo/High/Med/Low/Quiet)	395/355/290/220/170
	Motor Speed RPM: Heating (Turbo/High/Med/Low/Quiet)	1200/1100/900/700/610
	Indoor Sound Level dB: Heating (Turbo/High/Med/Low/Quiet)	43/41/37/32/29
	Auto Up-Down Louver	Yes
	Auto Left-Right Louver	Yes
	Dimension: H x W x D in (mm)	12 1/4 x 36 x 8 3/8 (312 x 914 x 213)
	Weight (Net/Ship)- lbs (kg)	24.49/30.56 (11.1/13.85)
	Drain Pipe Size O.D in	5/8
	WiFi*	Built-in
Refrigerant Line	Factory-Installed Refrigerant Detection Sensor (RDS)	No
	Refrigerant Detection Sensor (RDS) Compatible	Yes
	Liquid O.D. in	1/4
	Suction O.D. in	3/8

\*WiFi includes SmartHQ™ Home and SmartHQ™ Service compatibility.

### QS09WP2BEA

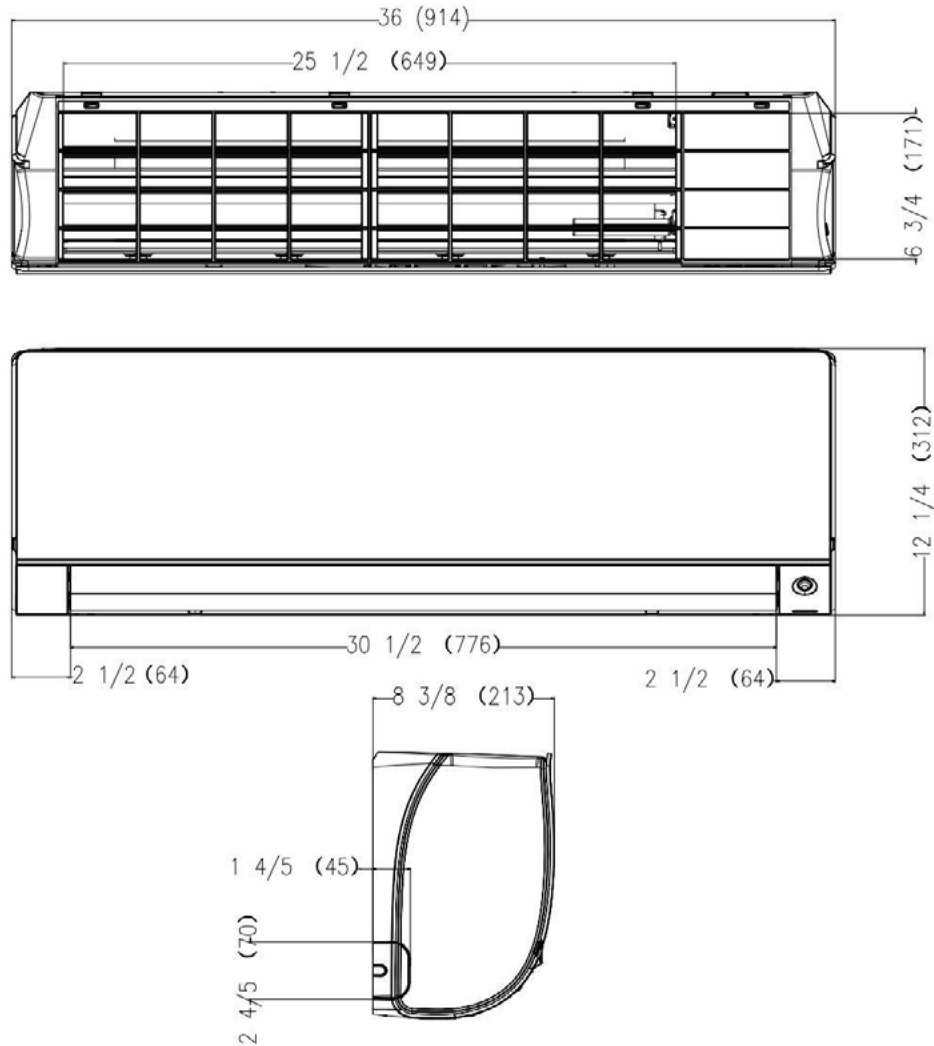

Note: Dimensions are shown in inches (millimeters)

#### SUBMITTAL REVISION HISTORY

03-31-25: Submittal release.