


Job Name: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Submitted By: \_\_\_\_\_  
 Unit: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

**US12FB2BEA**

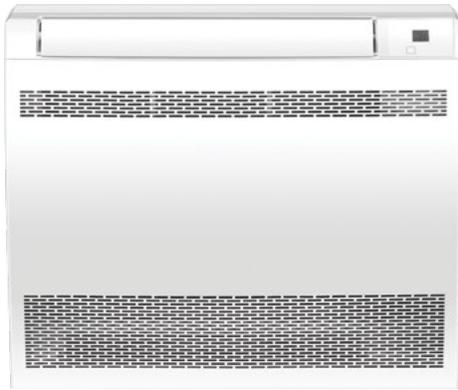

**Indoor Accessories**


|                                     |            |
|-------------------------------------|------------|
| <b>Remote Controller (Included)</b> | WJ26X35813 |
| <b>GE Appliances</b>                |            |
| <b>Wired Controller</b>             | GACT17B    |
| <b>Haier</b>                        |            |
| <b>Wired Controller</b>             | QACT17B    |

**Specifications**

|                  |   |   |
|------------------|---|---|
| Cooling          | Rated Cooling Capacity Btu/hr                             | 12,000                                    |
|                  | Rated Heating Capacity Btu/hr                             | 12,300                                    |
| Power            | Voltage, Cycle, Phase V/Hz/Phase                          | 208-230/60/1                              |
|                  | Operating Voltage Range                                   | 187-253 VAC                               |
| Indoor Unit      | Fan Speed Stages  | 5 + Auto                                  |
|                  | Airflow CFM: Cooling (Turbo/High/Med/Low/Quiet)           | 314/226/210/195/175                       |
|                  | Motor Speed RPM: Cooling (Turbo/High/Med/Low/Quiet)       | 800/590/510/440/390                       |
|                  | Indoor Sound Level dB: Cooling (Turbo/High/Med/Low/Quiet) | 47/41/37/33/25                            |
|                  | Airflow CFM: Heating (Turbo/High/Med/Low/Quiet)           | 311/223/200/195/175                       |
|                  | Motor Speed RPM: Heating (Turbo/High/Med/Low/Quiet)       | 800/590/510/440/390                       |
|                  | Indoor Sound Level dB: Heating (Turbo/High/Med/Low/Quiet) | 47/40/37/33/25                            |
|                  | Dimension: HxWxD in (mm)                                  | 23 5/8 x 27 1/2 x 8 3/4 (600 x 700 x 220) |
|                  | Weight (Net/Ship)- lbs (kg)                               | 32.41/43.43 (14.7/19.7)                   |
|                  | Drainpipe Size O.D. in                                    | 5/8                                       |
|                  | WiFi*   | Built-in                                  |
|                  | Factory-Installed Refrigerant Detection Sensor (RDS)      | Yes                                       |
| Refrigerant Line | Liquid Pipe O.D. (in)                                     | 1/4                                       |
|                  | Suction Pipe O.D. (in)                                    | 3/8                                       |

\*WiFi includes SmartHQ™ Home and SmartHQ™ Service compatibility.

**US12FB2BEA**

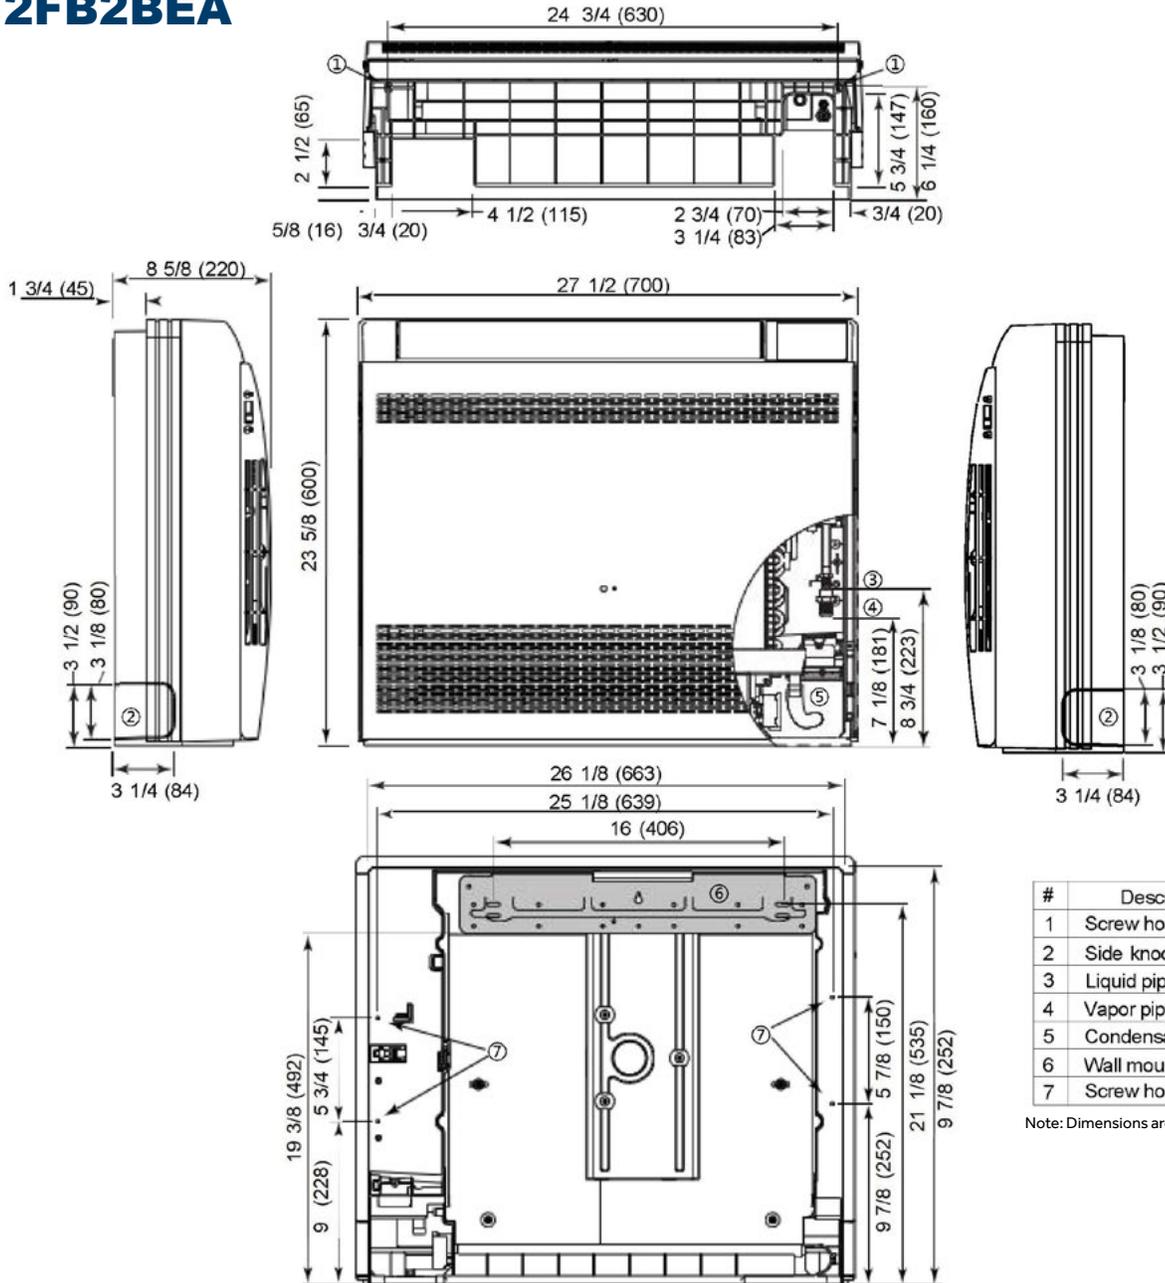

| # | Description                   |
|---|-------------------------------|
| 1 | Screw holes for floor install |
| 2 | Side knockout                 |
| 3 | Liquid pipe connection        |
| 4 | Vapor pipe connection         |
| 5 | Condensate drain              |
| 6 | Wall mounting plate           |
| 7 | Screw holes for wall install  |

Note: Dimensions are shown in inches (millimeters)

**SUBMITTAL REVISION HISTORY**

03-31-25: Submittal release.