

SUBMITTAL

Job Name: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Submitted To: \_\_\_\_\_

Construction: \_\_\_\_\_

Reference: \_\_\_\_\_

Approval: \_\_\_\_\_

Date: \_\_\_\_\_

Submitted By: \_\_\_\_\_

Unit: \_\_\_\_\_

Drawing #: \_\_\_\_\_

QS07WB2BEA



Indoor Accessories

Remote Controller (Included)	WJ26X35393
Wired Controller	QACT17B
Refrigerant Detection Sensor (RDS)	UALS01A


Specifications

Cooling	Rated Cooling Capacity Btu/hr	7,000
Heating	Rated Heating Capacity Btu/hr	8,000
Power	Voltage, Cycle, Phase V/Hz/Phase	208-230/60/1
	Operating Voltage Range	187-253 VAC
Indoor Unit	Fan Speed Stages	5 + Auto
	Airflow CFM: Cooling (Turbo/High/Med/Low/Quiet)	360/290/260/230/210
	Motor Speed RPM: Cooling (Turbo/High/Med/Low/Quiet)	1250/1050/950/850/750
	Indoor Sound Level dB: Cooling (Turbo/High/Med/Low/Quiet)	44/38/35/32/27
	Airflow CFM: Heating (Turbo/High/Med/Low/Quiet)	350/290/250/220/200
	Motor Speed RPM: Heating (Turbo/High/Med/Low/Quiet)	1200/1020/895/770/700
	Indoor Sound Level dB: Heating (Turbo/High/Med/Low/Quiet)	42/36/32/28/26
	Auto Up-Down Louver	Yes
	Auto Left-Right Louver	No
	Dimension: H x W x D in (mm)	11 7/8 x 34 1/4 x 7 3/4 (301 x 870 x 196)
	Weight (Net/Ship)- lbs (kg)	21.62/26.7 (9.8/12.1)
	Drain Pipe Size O.D in	5/8
	WiFi*	Built-in
Refrigerant Line	Factory-Installed Refrigerant Detection Sensor (RDS)	No
	Refrigerant Detection Sensor (RDS) Compatible	Yes
Refrigerant Line	Liquid O.D. in	1/4
	Suction O.D. in	3/8

\*WiFi includes SmartHQ™ Home and SmartHQ™ Service compatibility.



## QS07WB2BEA

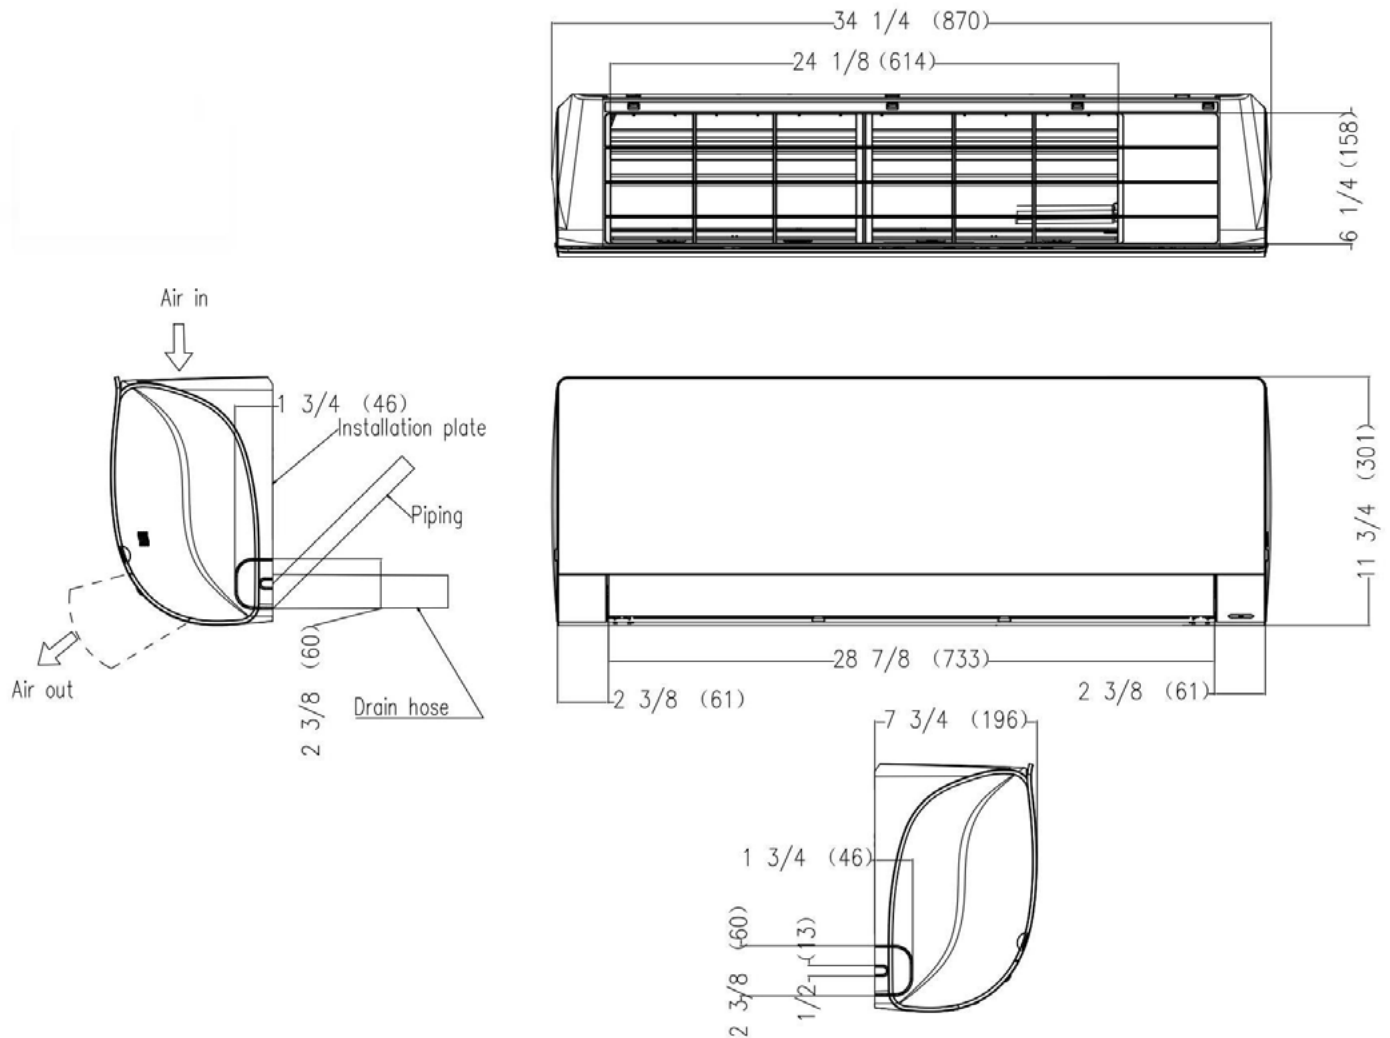

Note: Dimensions are shown in inches (millimeters)

## SUBMITTAL REVISION HISTORY

03-31-25: Submittal release.

04-21-25: Updates: heating &amp; cooling CFM; cooling sound level; weight.