

Job Name: _____
 Purchaser: _____
 Submitted To: _____
 Construction: _____
 Reference: _____

Approval: _____
 Date: _____
 Submitted By: _____
 Unit: _____
 Drawing #: _____

QS18WB2BEA



Indoor Accessories


Remote Controller (Included)	WJ26X35393
Wired Controller	QACT17B
Refrigerant Detection Sensor (RDS)	UALS01A

Specifications

Cooling	Rated Cooling Capacity Btu/hr	18,000
	Rated Heating Capacity Btu/hr	19,000
Heating	Voltage, Cycle, Phase V/Hz/Phase	208-230/60/1
	Operating Voltage Range	187-253 VAC
Power	Fan Speed Stages	5 + Auto
	Airflow CFM: Cooling (Turbo/High/Med/Low/Quiet)	570/520/480/420/330
	Motor Speed RPM: Cooling (Turbo/High/Med/Low/Quiet)	1250/1150/1050/950/800
	Indoor Sound Level dB: Cooling (Turbo/High/Med/Low/Quiet)	50/46/44/40/35
	Airflow CFM: Heating (Turbo/High/Med/Low/Quiet)	570/520/450/380/310
	Motor Speed RPM: Heating (Turbo/High/Med/Low/Quiet)	1250/1150/1025/900/750
	Indoor Sound Level dB: Heating (Turbo/High/Med/Low/Quiet)	48/46/41/38/33
	Auto Up-Down Louver	Yes
	Auto Left-Right Louver	No
	Dimension: H x W x D in (mm)	12 7/8 x 39 3/8 x 8 3/4 (327 x 999 x 223)
	Weight (Net/Ship)- lbs (kg)	27.8/34.64 (12.6/15.7)
	Drain Pipe Size O.D in	5/8
WiFi*	Built-in	
Factory-Installed Refrigerant Detection Sensor (RDS)	No	
Refrigerant Detection Sensor (RDS) Compatible	Yes	
Refrigerant Line	Liquid O.D. in	1/4
	Suction O.D. in	1/2

*WiFi includes SmartHQ™ Home and SmartHQ™ Service compatibility.

QS18WB2BEA

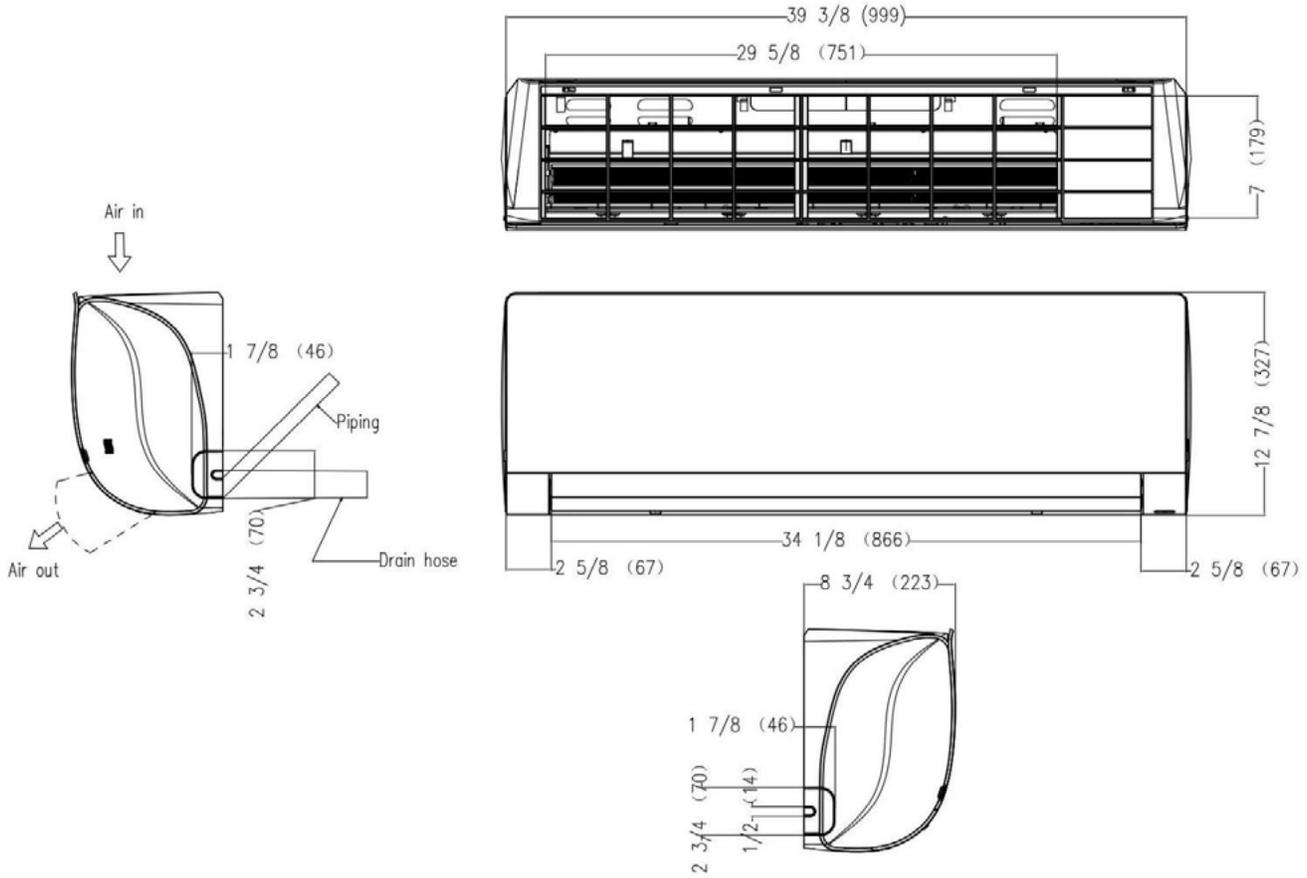

Note: Dimensions are shown in inches (millimeters)

SUBMITTAL REVISION HISTORY

03-31-25: Submittal release.